

90% THERMAL EFFICIENCY ENDLESS HOT WATER VERSATILE POWER VENT DESIGN

Today's homes demand more hot water than ever before, and the 90% efficient Vertex power vent gas water heater offers unprecedented levels of performance to meet the need. The 50-gallon Vertex delivers hot water output that rivals a 75-gallon atmospheric gas water heater. In fact, the fully condensing Vertex design is so advanced, it can deliver "endless hot water for showers"...a continuous flow of over 3 gallons per minute.* Yet Vertex is easy to install, with height, diameter and installation requirements similar to standard power vent units.

HELICAL INTERNAL HEAT EXCHANGER

- Positioned in the center of the tank, surrounded by water to virtually eliminate radiant heat loss from the chamber
- Achieves 90% thermal efficiency which saves money on operating costs compared to a standard 78% efficient gas water heater
- Spiral heat exchanger reduces the accumulation of lime scale; maintains higher efficiency performance over time

POWER VENTS USING PVC PIPE

- Combined vertical and horizontal runs terminating through an outside wall. Vents using PVC, CPVC or ABS pipe. Canadian installations require ULC S636 approved PVC or CPVC pipe for venting.
 - 2" pipe, vents up to 45 equivalent feet
 - 3" pipe, vents up to 128 equivalent feet
 - 4" pipe, vents up to 128 equivalent feet

MODULAR BLOWER

- Equipped with 120 volt, 60 Hz electrical system (rating 5 amps or less), 6-foot cord with standard 3-prong connector
- 2" PVC pipe, elbows and condensate drain supplied to connect heat exchanger outlet to blower
- PVC Vent Attenuation Assembly (VAA) supplied

SIDE-MOUNTED HOT AND COLD RECIRCULATING TAPS

- Allows Vertex to be installed as part of combination space heating/water heating applications or any system requiring a recirculating hot water loop, including radiant floor heating

INTELLI-VENT™*** GAS CONTROL

- Equipped with nearly indestructible silicon nitride hot surface ignitor — no standing pilot
- Advanced electronics for more precise control of water temperature and easy to understand system diagnostics

COMMERCIAL GRADE GLASS LINING

- A. O. Smith PermaGlas® Ultra Coat™ process provides superior protection against corrosion
- Protects all interior tank surfaces including inside and outside of helical heat exchanger

TWO HEAVY-DUTY ANODE RODS

- Provide maximum protection against corrosion

GREEN CHOICE® GAS BURNER

- Patented "Eco-Friendly" design reduces NOx emissions by up to 33% and meets less than 40ng/j requirements for low NOx emissions

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

MAXIMUM HYDROSTATIC WORKING PRESSURE: 150 PSI

* 3.07 GPM continuous flow, based on 65°F inlet water temperature, 110°F outlet temperature.

**Intelli-Vent™ is a registered trademark of Emerson Electric Company

GPHE-50



Low Lead Content

VERTEX™ 90% THERMAL EFFICIENCY POWER VENT

CODES AND STANDARDS

- Design-certified by UL (Underwriters Laboratories) according to ANSI Z21.10.3 - CSA 4.3 Standards
- Meets the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IESNA 90.1

SIX-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete warranty details, consult written warranty shipped with heater or contact A. O. Smith



| MODEL NUMBER | BTU INPUT PER HOUR | GALLON/LITRE CAPACITY | FIRST HOUR DELIVERY GALLONS/LITRES | RECOVERY 90°F RISE GALLONS PER HOUR | SHIPPING WEIGHT LBS/KG |
|--------------|--------------------|-----------------------|------------------------------------|-------------------------------------|------------------------|
| GPHE-50 | 76,000 | 50 / 189 | 127 / 481 | 92 | 210 / 95 |

* Natural gas only

DIMENSIONS IN INCHES/CM

| MODEL | A | B | C | D | E | F | G | H | J | K |
|---------|--------------|--------------|----------|---------|------------|---------|---------|--------|-------------|---------|
| GPHE-50 | 70-5/8 / 179 | 68-1/4 / 173 | 52 / 132 | 21 / 53 | 9-1/8 / 23 | 12 / 30 | 22 / 56 | 8 / 20 | 15-3/4 / 40 | 27 / 68 |

Inlet and outlet connections: 3/4" male
Circulation loop connections: 3/4" female

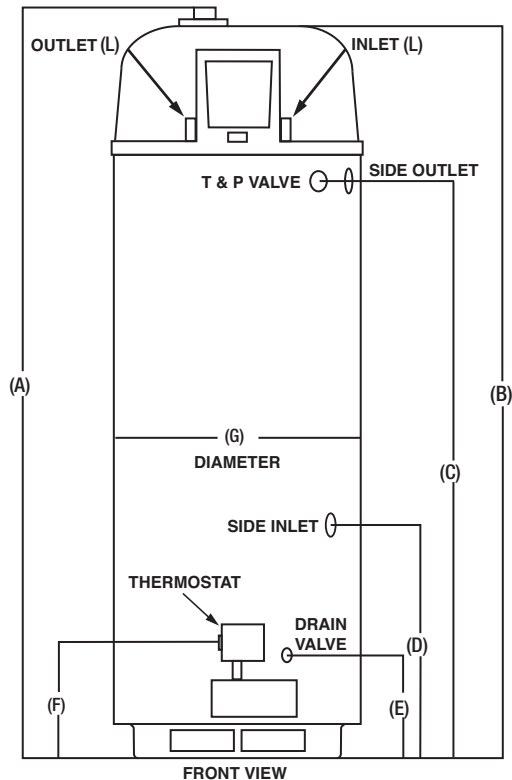

* INSTALL IN ACCORDANCE WITH LOCAL CODES